




## HS230 Brass Compression Fittings for Pex pipe

HONSON HS230 Brass compression Fittings for PEX pipe are well-designed and suitable to use in plumbing system. The fittings are available in sizes from  $\varnothing 16$  to  $\varnothing 25$ . Easily installed and disassembled.

### Structure

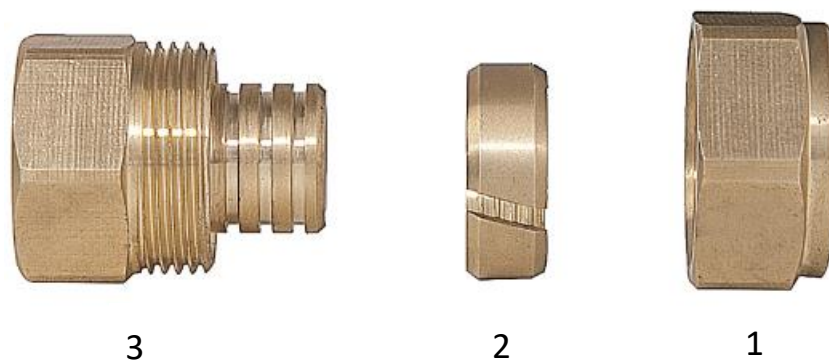


Item	Description	Materials
1	Nut	CW617N-4MS / MS58
2	Lock Ring	MS58
3	Body	CW617N-4MS / MS58

### Features

- Ideal for use in plumbing system
- CE approved
- Fast and simple installation with spanner
- Removable and reusable
- sizes from  $\varnothing 12$  to  $\varnothing 25$
- Marked for full traceability

### Installation Instruction

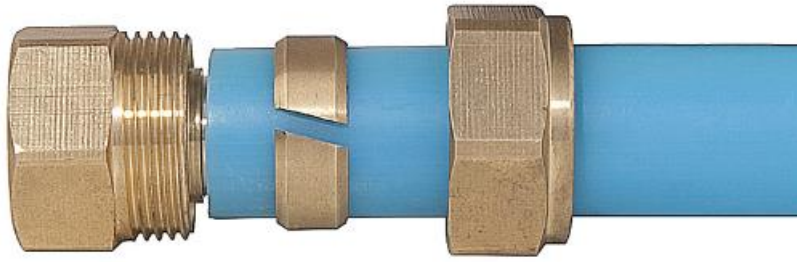

1. To avoid incorrect assembly, you should check the dimensions of the components before installation.
2. Cut the pipe perpendicular to its axis, using a shears (you are advised to rotate the shears slightly while you are cutting) or the wheel pipe-cutter.
3. Deburr and calibrate the internal surface of the pipe with appropriate tools.
4. Fit the nut, the lock ring on the pipe sequentially.
5. Insert the pipe with the components on the body up to the mechanical stop.
6. Tighten the nut by hand first; then tighten the nut with spanner.